

LEXAN™ MARGARD™ FAF2 SHEET

PRODUCT DATASHEET

DESCRIPTION

MARGARD™ MRFAF2 sheet is a two side coated LEXAN polycarbonate sheet offering long term anti-fog performance, excellent scratch resistance, formability, impact resistance, dimensional stability and optical clarity. LEXAN MARGARD FAF sheet also exhibits chemical resistance, tintability and anti-static properties. It has been specifically developed to offer excellent performance in the visor / eye protection industries and related

Industries:

- Industrial / Sports visors and goggles
- Motorcycle visors
- Windshields, mirrors and windows
- Sunglasses
- Appliance fascias
- Instrument lenses and display panels

TYPICAL PROPERTY VALUES◆

PROPERTY	TEST METHOD	UNITS	VALUE
Physical			
Specific Gravity	ASTM D792	-	1.20
Light Transmission (Average at 0.118")	ASTM D1003	%	86
Initial Haze		HU	<1
Taber @ 100 cycles	ASTM D1044 (ANSI Z26.1)	% haze	<15
Falling Silica (1000g sand)	ASTM D 968	% haze	<5
Water absorption (24 hrs)	ASTM D 570	%	0.15
Water absorption (Equilibrium)	@ 73°F	%	0.35
Fog free time	SABIC-IP test	Seconds	>30
Mechanical			
Tensile Strength, Yield	ASTM D638	psi	9,500
Ilexural Strength	ASTM D790	psi	13,500
Instrumented impact 1/2" dia. Dart (gauge dependent) @73F			
(Average at 0.118")	ASTM D3763	ft-lbs	38
(at 0F)		ft-lbs	34
Thermal			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75x10-5
Heat Deflection Temperature @ 66 psi			
(Average at 0.118")	ASTM D648	°F	280

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics, Specialty Film & Sheet representative.

™ LEXAN is a trademark of SABIC.

UL File Number: E121562


ABRASION RESISTANCE COMPARISON

LEXAN MRFAF2 sheet exhibits significantly less hazing than uncoated polycarbonate sheet as shown in the abrasion resistance chart.

Test Method	ASTM D 1044 Z26.1	% Haze		
		Uncoated Polycarbonate	LEXAN MRFAF2 sheet	Glass
Taber Abrasion 100 Cycles CS 10F		35.0	<15	0.5

‡ The Taber Abrader test measures the percent of change in haze that results from the grinding action of two abrasive impregnated wheels on the test samples. A constant load of 500 grams is maintained as the samples rotate on a turntable for a predetermined number of revolutions.

IMPACT RESISTANCE

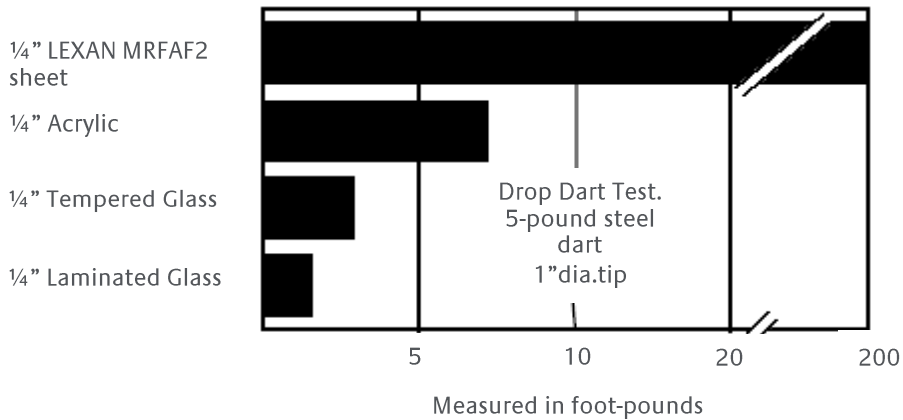

CHEMICAL RESISTANCE

LEXAN MRFAF2 sheet has sufficient resistance to most mineral oils, greases, aliphatic hydrocarbons and acids under low or moderate stress levels. Specific (application related) testing is always advised, especially in applications where the MRFAF2 sheet will come into contact with aggressive chemicals.

ANTI-FOG / ANTI-STATIC

LEXAN MARGARD FAF sheet maintains anti-fog characteristics even after repeated cleaning (refer to cleaning guidelines). The anti-fog property is effective in a wide range of temperature and humidity environments. LEXAN MARGARD FAF can dissipate the build-up of electrostatic charges.

CONTACT US:

Middle East and Africa

SABIC Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Email

sfs.info@sabic-ip.com

Americas

Specialty Film & Sheet
1 Plastics Avenue
Pittsfield, MA 01201
USA
Toll-free 1 800 323 3783
T 1 413 448 6655
F (888) 443 2033
E Spinside.sales@sabic-ip.com

Europe

Specialty Film & Sheet
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E sfs.info@sabic-ip.com

Asia Pacific

Specialty Film & Sheet
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 2037 8188
F +86 21 2037 8288
E sfs.info@sabic-ip.com

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with TM are trademarks of SABIC or its subsidiaries or affiliates.
© 2014 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

* Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

www.sabic.com/sfs

