

# LEXAN™ XL102UV SHEET

## PRODUCT DATASHEET

### DESCRIPTION

LEXAN™ XL102UV sheet combines the impact strength of LEXAN polycarbonate sheet with a proprietary UV-resistant surface treatment on both sides that protects it from weathering. LEXAN XL102UV sheet is the only polycarbonate glazing material backed by a ten-year limited warranty against yellowing, loss of light transmission and breakage<sup>#</sup>). Providing long-lasting clarity over a wide range of weather conditions and environments, LEXAN XL102UV sheet improves service life and reduces life-cycle material costs. LEXAN XL102UV sheet is well suited for all types of vertical glazing and overhead applications such as skylights, covered walkways and barrel vaults.

### PRODUCT AVAILABILITY ◆

PROPERTY	TEST METHOD	UNITS	VALUE
<b>Physical</b>			
Specific Gravity	ASTM D792	-	1.20
Sound Transmission, STC Rating (36" x 84")	ASTM E9070	-	
@ 0.118"			25
@ 0.177"			29
@ 0.236"			31
Light Transmission (Average)	ASTM D1003	%	88
Rockwell Hardness	ASTM D785	-	M70, R118
Chemical Resistance	ANSI Z26.1		Passes
<b>Mechanical</b>			
Tensile Strength @ Yield	ASTM D638	psi	9,300
Tensile Modulus	ASTM D638	psi	345,000
Flexural Strength	ASTM D790	psi	14,500
Flexural Modulus	ASTM D790	psi	360,000
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	psi	1,000
Compressive Strength @ yield	ASTM D695	psi	10,400
Elongation	ASTM D638	%	85
Izod Impact Strength, up to 125 mils, Notched Drop	ASTM D256A	ft-lbs-in	12-18
Dart Impact Strength, 1" dia. Dart @ 73°F	SABIC TestE	ft-lbs	>200
@ 0°F			>200
<b>Thermal</b>			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 <sup>-5</sup>
Thermal Shrinkage	SABIC Test	%	1
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	
@ 66 psi			270
Shading Coefficient	ASHRAE	-	280
Clear			1.02
Grey/Bronze	ASTM D746	°F	.79
<b>Flammability</b>			
Horizontal Burn (Flame Spread) AEB	ASTM D635	in	<1
Ignition Temperature Flash	ASTM D1929	°F	873
Self			1,076

# Request details of limited warranty and maintenance instructions

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics, Specialty Film & Sheet representative.

£ Measured by dropping a 5-pound dart (1" dia. tip) from a height of 40 feet. These are typical properties and are not intended for specification purposes. If minimum certifiable properties are required, please contact your local SABIC Innovative Plastics representative or the SABIC Innovative Plastics Quality Services Department.

™ LEXAN is a trademark of SABIC.

UL File Number: E121562

## ENERGY EFFICIENCY

LEXAN XL102UV sheet provides up to 25% better thermal insulation than single-panel glass. Double glazing increases the advantage.

### U-Value Comparison

Winter Heat Loss (BTU/hr./sq.ft./°F)			
Thickness	LEXAN Glass XL102UV Sheet	Glass	LEXAN <sup>®</sup> Sheet % Advantage Over Glass
.118"	1.05	1.16	10
.177"	1.01	1.15	12
.236"	.96	1.14	16
Double Glazed#	.43	.49	12

# Two ¼ liters with ½" air space

Summer Heat Gain (BTU/hr./sq.ft./°F)			
Thickness	LEXAN Glass XL102UV Sheet	Glass	LEXAN <sup>®</sup> Sheet % Advantage Over Glass
.118"	.97	1.04	7
.177"	.93	1.04	11
.236"	.90	1.04	14
Double Glazed#	.43	.56	20

# Two ¼ liters with ½" air space



## WEIGHT

Only 15% the weight of double-panel glass, LEXAN XL102UV sheet requires less structural support than either glass or acrylic. Its light weight also results in easier handling and installation, as well as transportation cost savings.

Weight (lbs./ft. <sup>2</sup> )		
Thickness	LEXAN <sup>®</sup> Glass XL102UV Sheet	Glass
.118"	.74	1.60
.177"	1.11	2.40
.236"	1.47	3.20

## IMPACT RESISTANCE

Virtually unbreakable, LEXAN XL102UV sheet has 250 times the impact strength of glass and 30 times that of acrylic.

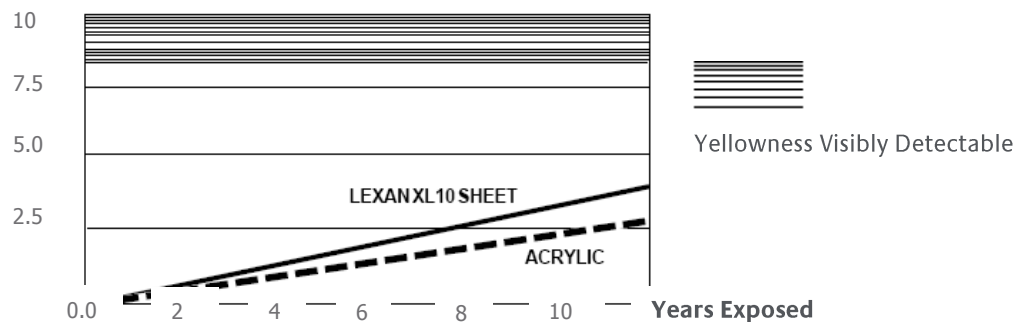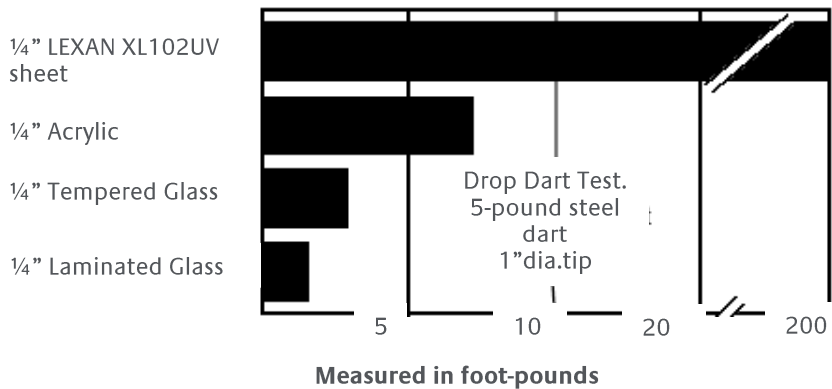

---

## CONTACT US:

### Middle East and Africa

SABIC Global Headquarters  
PO Box 5101  
Riyadh 11422  
Saudi Arabia  
T +966 (0) 1 225 8000  
F +966 (0) 1 225 9000  
E [info@sabic.com](mailto:info@sabic.com)

### Email

[sfs.info@sabic-ip.com](mailto:sfs.info@sabic-ip.com)

### Americas

Specialty Film & Sheet  
1 Plastics Avenue  
Pittsfield, MA 01201  
USA  
Toll-free 1 800 323 3783  
T 1 413 448 6655  
F (888) 443 2033  
E [Spinside.sales@sabic-ip.com](mailto:Spinside.sales@sabic-ip.com)

### Europe

Specialty Film & Sheet  
Plasticslaan 1  
4612 PX  
Bergen op Zoom  
The Netherlands  
T +31 (0)164 293678  
F +31 (0)164 293272  
E [sfs.info@sabic-ip.com](mailto:sfs.info@sabic-ip.com)

### Asia Pacific

Specialty Film & Sheet  
2550 Xiupu Road  
Pudong  
201319 Shanghai  
China  
T +86 21 2037 8188  
F +86 21 2037 8288  
E [sfs.info@sabic-ip.com](mailto:sfs.info@sabic-ip.com)

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with <sup>TM</sup> are trademarks of SABIC or its subsidiaries or affiliates.  
© 2014 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

<sup>†</sup> Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

[www.sabic.com/sfs](http://www.sabic.com/sfs)

