




HIGH OPTICAL QUALITY LEXAN™ OQ SHEET PORTFOLIO

TRANSPORTATION GLAZING SOLUTIONS

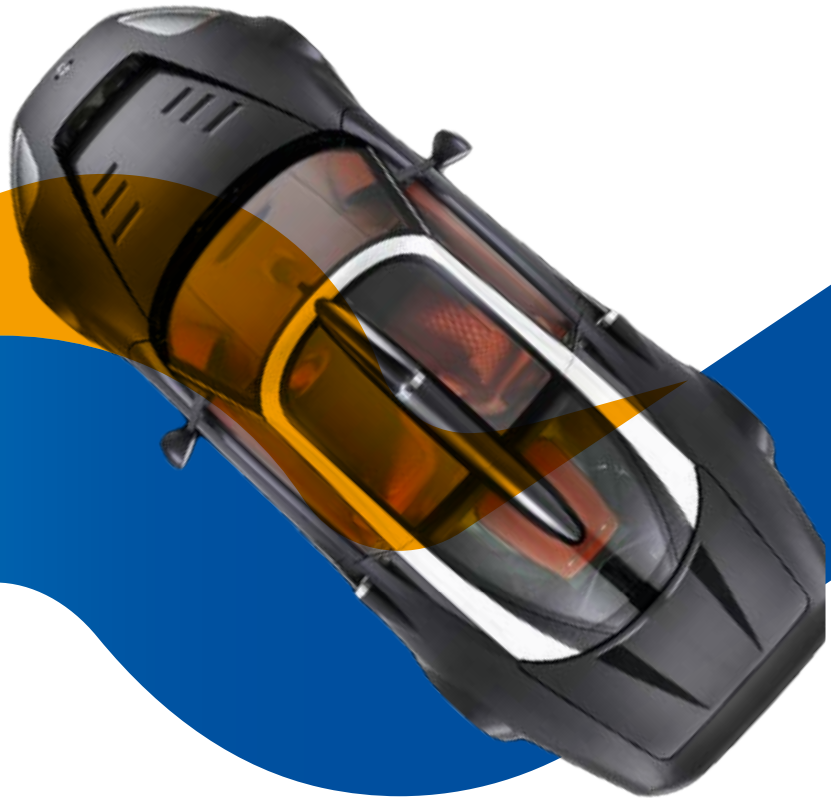

CHEMISTRY THAT MATTERS™

LEXAN™ OQ SHEET PORTFOLIO

Virtually unbreakable, high optical quality, LEXAN™ sheet portfolio of polycarbonate (PC) products, from SABIC, combine crystal clear transparency with lightweight and features outstanding low ripple and distortion, including an extremely low number of optical defects. These optical quality and coated sheets are supplied with industry leading optical specifications and produced with a class 10,000 clean room technology.


LEXAN™ OQ sheet portfolio can offer one of the best optical quality materials for the glazing of forestry vehicles, high-speed trains, high security facilities and bullet resistant glass-PC laminates for VIP, military and police vehicles.



DEFINITION OF OPTICAL QUALITY

- Visual defects (core & surface)
 - Gels (un-molten PC), black specs (burned PC)
 - Inclusions (foreign particles), air bubbles, fibers
 - Coating defects
- Optical distortion

OPTICAL SPECIFICATIONS AND OPTICAL QUALITY LEXAN SHEET PORTFOLIO

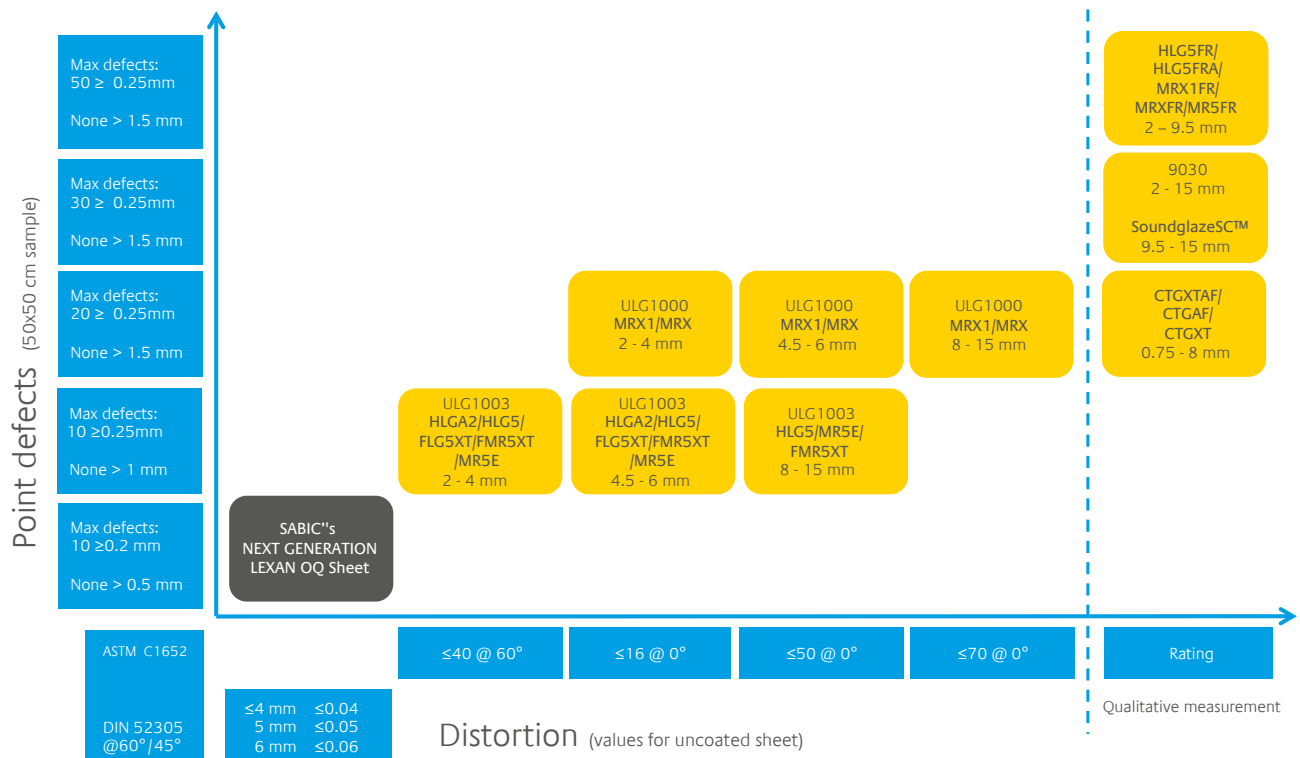

		OQ ¹	TABER HAZE ²	WEATHER- ABILITY ³	FORM- ABILITY ⁴	UL LISTING	GAUGES (MM)
CURVED APPLICATIONS							
UNCOATED LEXAN SHEET GRADES							
ULG1003	Very high optical quality, thermoformable sheet with very low distortion level for coating or lamination applications.	Very high	> 15	1	50	N/A	2 - 15
ULG1000	High optical quality, thermoformable sheet for coating or lamination applications. Specially designed for automotive side glazing applications,	High	> 15	1	50	N/A	2 - 15
1-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
HLGA2	For interior and non-UV intense glass/pc lamination applications. Improved secondary operations (crack sensitivity) combined with excellent abrasion.	Very high	0.5 - 1	1	0.3	N/A	1 - 8
FLG5XT	Formable (cold/warm) hard coated sheet formed glass/PC lamination applications.	High	4 - 8	5	5	N/A	2 - 8
ANTI-FOG							
CTGAF1	Formable 1 side anti-fog coated sheet with abrasion resistance for visor applications.	High	15 - 20	1	5	N/A	0.75 - 5
2-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
FMR5XT	Formable (cold/warm) coated sheet for non-UV intense formed applications.	High	4 - 8	5	5	N/A	2 - 12
CTGXT	Formable coated, thin gauge sheet for formed applications requiring abrasion resistance on both sides	High	4 - 8	5	5	N/A	0.75 - 2
ANTI-FOG							
CTGXTAF	Formable coated sheet with weathering & abrasion resistance on one side and anti-fog & abrasion resistance on the other side	High	4 - 8	5	5	N/A	0.75 - 5
CTGAF2	Formable 2 sides anti-fog coated sheet & abrasion resistance for visor applications	High	15 - 20	1	5	N/A	0.75 - 5
FLAT APPLICATIONS							
1-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
HLG5	Good abrasion resistant, highly weatherable sheet for flat, outdoor glass/pc lamination applications.	Very high	1 - 3	7	0	HB/>3	2 - 12
MRX1	1 side hard coated, weatherable sheet for various flat applications.	High	2 - 4	5	0	N/A	2 - 15
2-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
MR5E	Abrasion resistant, weatherable sheet with enhanced chemical resistance & anti-graffiti properties (ECE R43 certified) for use in public areas for high abuse applications for flat applications.	Very high	1 - 3	7	0	HB	2 - 15
MRX	Sheet with wider optical specifications, providing good balance of weatherability, abrasion resistance and costs for flat applications.	High	2 - 4	5	0	N/A	2 - 15
FLAME RETARDANT APPLICATIONS							
1-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
HLG5FR	Flame retardant, 1 side hard coated weatherable sheet for flat glass/pc lamination.	Std	1 - 3	7	0	N/A	3 - 5*
HLG5FRA	Flame retardant (according to FST), 1 side hard coated weatherable sheet for flat glass/pc lamination, especially for aircraft.	Std	1 - 3	7	0	FST	2 + 3
MRX1FR	Flame retardant, high optical quality, 1 side hard coated weatherable for various flat applications	Std	2 - 4	5	0	N/A	3 - 6*
2-SIDE COATED LEXAN SHEET GRADES							
MAR-RESISTANT							
MR5FR	Flame retardant, 1 side hard coated weatherable sheet for flat glass/pc lamination.	Std	1 - 3	7	0	V0/3-6 5VB/>6	3 - 9.5
MRXFR	Flame retardant, high optical quality, 2 sides hard coated weatherable for various flat applications	Std	2 - 4	5	0	N/A	3 - 6*

* Other gauges on request

1. OQ - Optical Quality: See page 3 for classifications

2. Taber Haze according ASTM D1044, CS-10F 100 cycles 500gr.

3. Weatherability according to ISO 11431A test, 800 hours - 1 year in central Europe (years of warranty)

4. Formability (maximum thinning in %)

CONTACT US

Middle East and Africa

Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Americas

Specialty Film & Sheet
One Plastics Avenue
Pittsfield, MA 01201
USA
Toll-free
1 800 323 3783 ext.3
T 1 413 448 7125
F (888) 443 2033
E sfscustomerservice@sabic.com

Europe

Specialty Film & Sheet
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E sfs.info@sabic.com

Asia Pacific

Specialty Film & Sheet
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 3222 4500
F +86 21 6289 8998
E sfs.info@sabic.com



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

Unless otherwise noted, SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates. Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.
© 2015 Copyright SABIC. All rights reserved.