




FUNCTIONAL FORMS

# SAFETY+ AESTHETICS

LIGHTWEIGHT, COMPLIANT THERMOPLASTIC MATERIALS  
FOR RAILWAY INTERIORS

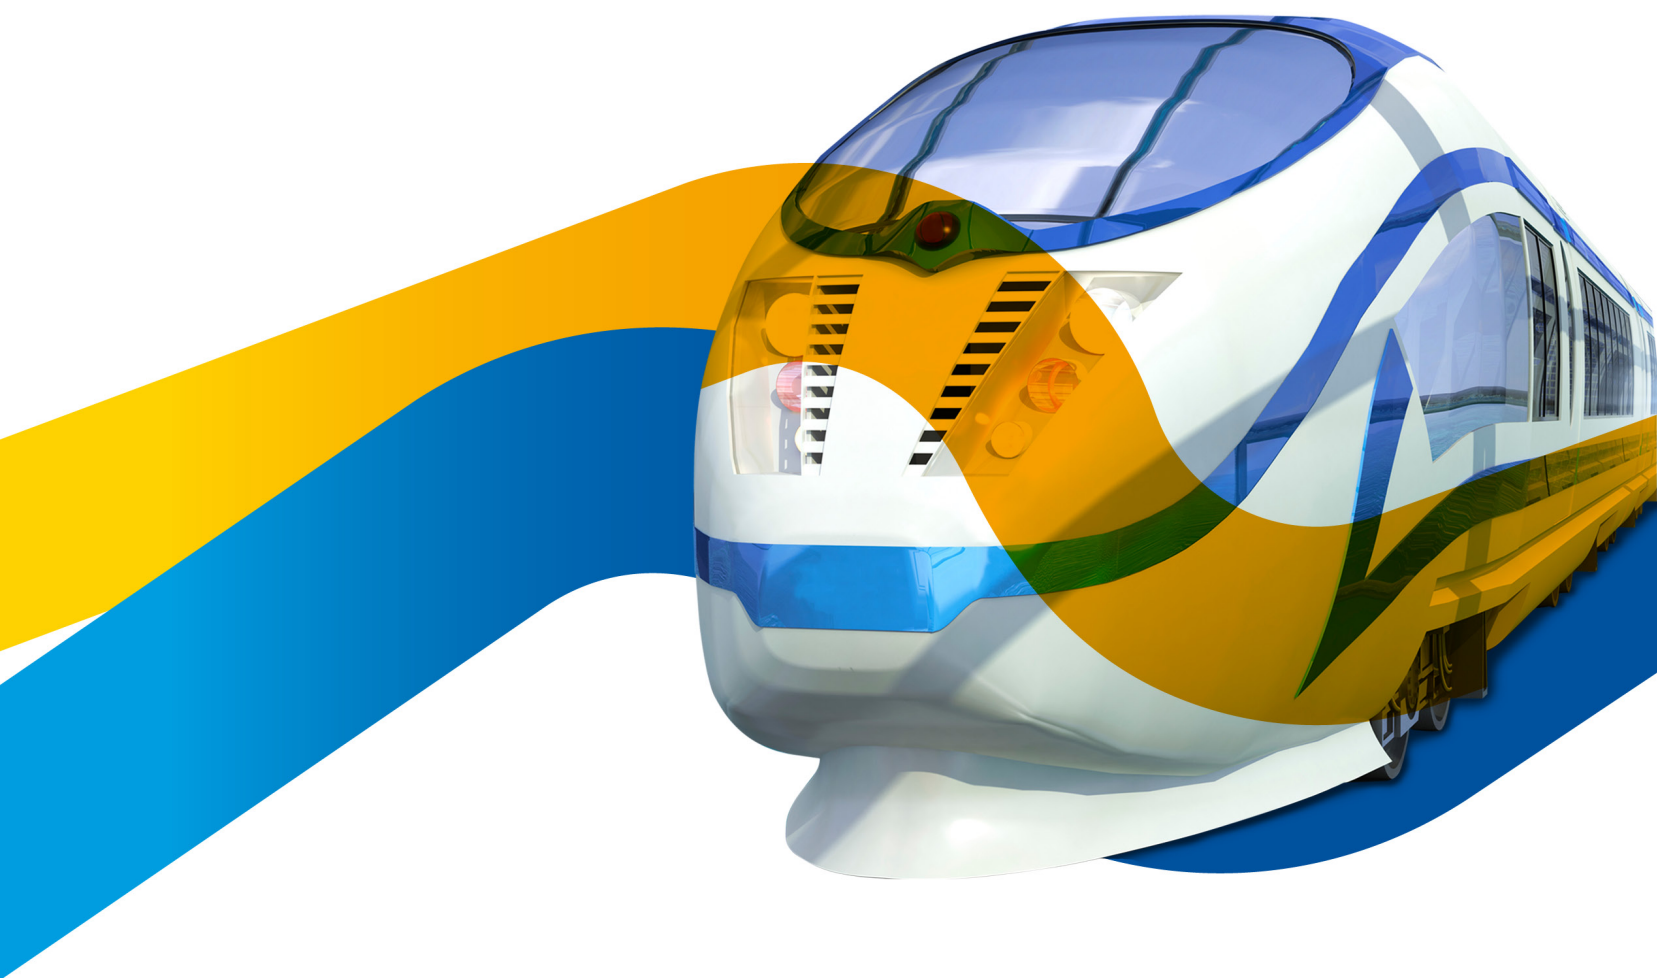

CHEMISTRY THAT MATTERS™

COMBINING THERMOPLASTICS EXPERTISE WITH IN-DEPTH KNOWLEDGE OF THE INDUSTRY STANDARDS, REGULATIONS AND TRENDS, SABIC IS COMMITTED TO KEEPING ITS CUSTOMERS IN THE TRANSPORTATION INDUSTRY AT THE LEADING EDGE OF MATERIALS AND PROCESSING TECHNOLOGIES.

SABIC OFFERS A PORTFOLIO OF HIGH PERFORMANCE, ENGINEERING THERMOPLASTICS INCLUDING RESINS, SHEETS, FILMS AND COMPOSITES, SPECIFICALLY DESIGNED FOR RAILWAY INTERIORS THAT CAN MEET INDUSTRY STANDARDS AND FIRE RESISTANCE REGULATIONS; MAY REDUCE OVERALL SYSTEM COSTS; AND ENHANCE THE AESTHETICS, SAFETY AND COMFORT OF THE TRAIN CABIN ENVIRONMENT.

# SAFETY, AESTHETICS & PERFORMANCE



Today's public transportation industry is increasingly focused on safety. To create differentiated designs for new rail rolling stock or when refurbishing old ones, manufacturers are seeking the latest material solutions that not only meet current and upcoming safety regulations but also provide additional benefits ranging from durability and anti-vandalism protection to improved aesthetics, lower weight and system cost reduction.

Currently, fire safety regulations for rail interiors for conventional intercity, commuter passenger trains and lightweight high-speed trains are defined by The Federal Railroad Administration (FRA) of the U.S. Department of Transportation (DOT). SABIC has proactively developed and independently tested several materials designed specifically for compliance with these standards.

SABIC offers a number of materials for railway interior applications that conform to leading U.S. Department of Transportation, Federal Rail Administration fire safety regulations and supports increased material needs for

- Weight reduction
- Increased fire safety
- Graffiti resistance
- Vandalism resistance
- Lower system cost
- Design freedom
- Easy repairation
- Paint reduction







# LIGHTWEIGHT MATERIALS COMPLYING WITH INDUSTRY STANDARDS

The broad portfolio of materials for the rail interiors sector manufactured by SABIC can help manufacturers meet evolving fire safety requirements while delivering additional advantages such as Bromine/Chlorine free fire safety. The company offers a one-stop shop comprising new plastics solutions, assistance with materials and process selection and technical support services worldwide.

SABIC offers a broad portfolio of engineering resins, sheet, film and composite materials for interior applications that conform to the U.S. Department of Transportation Federal Transit Administration (FTA) fire safety norms and the National Fire Protection Association (NFPA) 130 Standard for Fixed Guideway Transit Systems regulation.

- SABIC'S SHEET PORTFOLIO**
- ULTEM™ R16SG29 sheet
  - LEXAN™ H6500 sheet
  - LEXAN KH6500 sheet
  - LEXAN FRA 25C sheet
  - LEXAN FRA 460 sheet
  - LEXAN MARGARD™ MRT sheet

- SABIC'S RESIN PORTFOLIO**
- ULTEM resin
  - LEXAN resin
  - LEXAN FST resin
  - NORYL™ low smoke resins
  - CYCOLOY™ resin



## RAILWAY PASSENGER SAFETY & REGULATORY OVERVIEW

Below table lists FRA and National Fire Protection Association (NFPA) 130 Standard for Fixed Guideway Transit Systems material requirements for flammability and smoke emission specifications of the rail transit vehicles in U.S.

MATERIALS		FLAMMABILITY		SMOKE EMISSION	
Category <sup>a</sup>	Function <sup>a</sup>	Test Procedure	Performance Criteria	Test Procedure	Performance Criteria
PASSENGER SEATS, SLEEPING AND DINING CAR COMPONENTS	Seat frames, mattress frames , seat and toilet shroud, food trays	ASTM E 162	I <sub>s</sub> ≤35 No flaming drips	ASTM E 662	Ds (1.5) ≤ 100 Ds (4.0) ≤ 200
PANELS	Wall, ceiling, partition, tables and shelves, windscreen	ASTM E 162	I <sub>s</sub> ≤35 No flaming drips	ASTM E 662	Ds (1.5) ≤ 100 Ds (4.0) ≤ 200
	Window, light diffuser, transparent plastic windscreens <sup>14</sup>	ASTM E 162	I <sub>s</sub> ≤100	ASTM E 662	Ds (1.5) ≤ 100 Ds (4.0) ≤ 200

a Categories and functions follow the FRA guidelines. FTA recommend practices are similar, but not identical  
14 For double window glazing, only the interior glazing is required to meet the requirements specified herein. (The exterior glazing is not required to meet these requirements.)

EXISTING FRA-CITED TEST METHODS:

American Society for Testing and Materials (ASTM)

ASTM E 162, Surface Flammability of Materials Using a Radiant Heat Energy Source

ASTM E 662, Specific Optical Density of Smoke Generated by Solid Materials

ASTM E1354, Heat and Visible Smoke Release Rates for Materials and Products Using an Oxygen Consumption Calorimeter

SMP 800C, Toxic Gas Generation by Materials on Combustion

# WEIGHT OUT & PART INTEGRATION

Engineering thermoplastics solutions from SABIC can help manufacturers address the growing demand for sustainability, lower system costs, improved durability and comfort and design innovation. Compared to metal, thermosets and glass, thermoplastics can significantly lower system costs through consolidation of parts to streamline production, avoidance of secondary operations such as painting, coating, machining and polishing, and lower shipping costs by reducing weight.

SABIC has introduced two new LEXAN sheet products to its materials portfolio. These new products include LEXAN H6500 sheet, a PC/ABS sheet grade and LEXAN KH6500 sheet, an anti-graffiti sheet grade that both comply with U.S. FRA railway standard. These products have been engineered to help rail customers meet growing demand for enhanced sustainability and advanced thermoplastic technologies with non-chlorinated and non-brominated flame retardance that enhance the design and development of rail interior applications.

LEXAN 9034 sheet, available in clear transparent and translucent colors, is a flame retardant, lightweight product that can be an excellent choice for light diffusers and light covers. It offers ease of processing, excellent formability and can help achieve part integration in train ceilings with light diffusers.

LEXAN H6500 sheet is an opaque, solid, low-gloss PC/ABS blend that delivers high stiffness for railway sidewalls, tables and seating. Its sustainable fire retardance meets the requirements of the Restriction of Hazardous Substances (RoHS) directive and it delivers non-chlorinated and non-brominated product technology. LEXAN H6500 sheet complies with current U.S. FRA standards. The material can be thermoformed at a lower temperature than traditional PC materials. Its molded-in color capability can help avoid the cost and environmental hazards of painting and provides excellent aesthetics.



Railway interior using new LEXAN KH6500 sheet





Amtrak uses LEXAN FRA 25C sheet for its passenger train's window glazing.

Both [LEXAN FRA 25C sheet](#) (.250") and [LEXAN FRA 460 sheet](#) (.460") are monolithic, high impact resistant polycarbonate sheets with a proprietary abrasion resistant surface, providing 70 times the impact resistance of laminated glass with no spalling. These products have been specifically developed for rail glazing applications. LEXAN FRA 460 sheet and dual glazed LEXAN FRA 25C sheet with a .250" air gap meet the UMTA glazing guidelines and the FRA Type I & II ballistic and impact requirements. Both products are UL listed.

[LEXAN FR60 flame-retardant film](#) is a clear, thin-gauge polycarbonate film with a polish finish on both sides, meeting the stringent requirements in railway interior applications. LEXAN FR60 film offers ease of thermoforming, hydroforming, embossing, die-cutting, folding and bending and is very suitable for applications such as print advertisement in passengers trains or metro, backlit advertisement panels and displays.

[ULTEM R16SG29 sheet](#) is a polyetherimide (PEI) material that features inherent flame retardancy and low smoke emission. It complies with the U.S. FRA norm for interior applications. ULTEM R16SG29 sheet delivers excellent impact resistance and chemical resistance for easy cleaning, anti-graffiti performance and long use of life.



ULTEM R16SG29 (PEI) sheet railway interior cladding



Compin chose LEXAN™ EXL resin to make various seating parts for the “Future Interior of the TGV” French railways high-speed train.

**LEXAN FST resin** (flame-smoke-toxicity) polycarbonate (PC) copolymer is the first thermoplastic resin solution for rail seating applications to meet the strictest fire safety requirements under the U.S. railway NFPA-130 standard. LEXAN FST3403 copolymer is developed specifically for seat back shells and side covers. In addition to its exceptional heat release, smoke density and toxicity performance, documented by independent laboratory testing, the LEXAN FST copolymer provides high flow capabilities that enable large parts, such as seat back shells, to be injection molded without marks, texture defects, flow lines and other surface defects. Another aesthetic benefit of the copolymer is its ability to be custom colored, which avoids the need for secondary painting.

**LEXAN EXL resin** demonstrates durability in railway seating designed for Très Grande Vitesse (TGV) – the French railway high-speed trains. COMPIN chose this super-tough polycarbonate resin with added impact performance and low temperature ductility. LEXAN EXL resin maintains impact ductility after outdoor exposure, demonstrating good weatherability. It also has a low temperature ductility to -60 °C. This resin's flame retardancy conforms to Blue Angel and TCO99 standards and resists a variety of industrial and consumer chemicals. LEXAN EXL resin also has a 20 - 40% reduction in cycle time processability. This resin exhibits good flow properties and extensive color capability. It also matched the customer's specific requirement for a particular shade of grey (gris 150 sable). This, plus its light-weight, makes LEXAN EXL resin a great materials candidate for various railway seating parts.

**NORYL NH6010B resin**, offers low smoke density (ASTM E662 test) and toxicity (NF X 70-100 test) values compared to metal conduits, while remaining economically viable. This can be a critical advantage in transportation applications, as the first four minutes after the start of a fire are considered crucial in terms of occupant survival. Materials that generate low smoke in this short span can help facilitate passengers' exit to safety. With increasing awareness about environmental concerns, Fraenkische Rohrwerke (Germany), manufacturer of electrical conduit and drainage systems, introduced a range of halogen-free conduits based on NORYL NH6010B non-halogenated resin offering low smoke, toxicity, and flame performance to comply with IEC 61386, the European Union (EU) standard for electrical conduit and suitable for extrusion or injection molding.






For first-class railcars' tough, new seat back shells and side panels, Grammer Railway Interior GmbH has selected SABIC's new LEXAN FST copolymer – which meets requirements for the highest hazard level (HL3) for R6 under Europe's EN 45445-2 harmonized standard for fire safety.

CYCOLOY resins are amorphous PC/ABS blends that offer the superior mechanical properties and heat resistance of polycarbonate (PC) resins combined with the excellent processability of ABS materials. In addition, CYCOLOY resins offer non-brominated and non-chlorinated FR systems, odorless solutions and superior heat aging and color stability properties versus comparable ABS materials.

Generic property comparison

PROPERTY	ABS MATERIALS	PC/ABS
Halogen free FR	●	●
Low emission / odorless	●	●
Heat aging	●	●
Color stability	●	●
High Heat	●	●
Impact @ RT	●	●
Impact @ low T	●	●
Shrinkage	●	●
Flow	●	●

ULTEM resin spun fibers may address your need for inherent flame resistance; low smoke toxicity; aesthetic. For railway interior fabrics and panels, ULTEM polyetherimide (PEI) resin from SABIC has the high-temperature performance and inherent flame resistance manufacturers need to meet the increasing challenges of stringent flame resistance and low FST (Flame, Smoke and Toxicity) regulations. Plus, with great aesthetic qualities and good dyeability, it's a smart way to achieve both compliance and appearance at the same time. This advanced amorphous polymer allows woven fabrics to be colored using conventional exhaust dying techniques, resulting in exceptional colorfastness and high tolerance to UV light. ULTEM resin also offers lightweight advantages along with outstanding mechanical integrity at elevated temperatures, and can be blended with other fibers for an optimal balance of performance and cost.

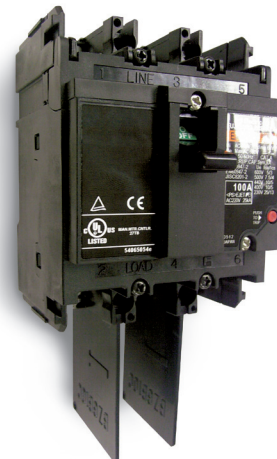

Fuji Electric using NORYL resins for switch gear isolator plates



The new seats of Brazil's new Sao Paulo monorail are being manufactured by Monte Meão for Bombardier using NFPA-130 compliant LEXAN FST3403 resin.







# ANTI-VANDALISM

For passenger comfort and overall usability, thermoplastics from SABIC provide ease of cleaning, protection against graffiti and high impact performance to resist vandalism.

SABIC's new product, called **LEXAN™ KH6500 sheet** is an opaque product with outstanding anti-graffiti properties that will help railway interior designers and manufacturers to create aesthetically-pleasing components which are resistant to graffiti and vandalism, helping lower maintenance cost. LEXAN KH sheet meets the requirements of current U.S. FRA rail standard, offering customers a non-chlorinated and non-brominated material option supporting their sustainability efforts.

This new LEXAN sheet solution complies with French anti-graffiti norm NF F 31-112, offering outstanding chemical resistance against graffiti and cleaning agents, providing cost-efficient choice. They are an excellent choice to replace polyvinyl chloride (PVC), polyester, vinyl ester or phenolic fiber-reinforced plastic (FRP) materials used in many interior train applications including interior panels, window frames, ceilings and other large interior parts.

**LEXAN MARGARD™ MRT sheet** can be an excellent choice to reduce railcar weight by replacing traditional glass, offering excellent abrasion resistance behavior combined with excellent chemical resistance. Additionally, LEXAN MARGARD MRT sheet can provide reduced weight, high impact strength and forced entry protection, graffiti resistance, excellent flame retardance and UV- and abrasion resistance. It can be an excellent candidate for the compartment partitions, windscreens, interior separation windows and map covers.



Coated, transparent LEXAN MARGARD Sheet has been chosen by TOHO SHEET & FRAME CO., LTD, a leading Japanese converter, for the double glazing of side windows of The JAPAN RAILWAYS HOKKAIDO.



Italian railways compartment separators using LEXAN MARGARD sheet.

# THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS

OPAQUE SHEET		
ULTEM Sheet (PEI)	POLYCARBONATE & Blends FR - Transportation	
High Modulus Meets U.S. FRA Norm Ceilings & Side Walls	High Modulus Meets U.S. FRA Norm	Anti-Graffiti, High Stiff, Low Gloss FR, Meets U.S. FRA Norm
ULTEM RT16SG29 SHEET	LEXAN H6500 Sheet	LEXAN KH6500 sheet

TRANSPARENT SHEET				
POLYCARBONATE FR - Transportation				
Flame Retarded Clear Polycarbonate (Also Available in Opal White)	Coated Flame Retarded Polycarbonate for Rail Glazing	UV, Mar-resistant, High Optical Quality PC	FRA Compliant for Glazing, Coated Polycarbonate	Flame Retardant Thin Gauge Film
LEXAN F2000 Sheet	LEXAN FRA 25C Sheet	MARGARD MR5E Sheet	LEXAN FRA 460 Sheet	LEXAN FR60 Film

Ceilings & Side Walls	CEILING	●	●	●	-	-	-	-	-
	WINDOW FRAME	●	●	●	-	-	-	-	-
	WALL CLADDING	●	●	●	-	-	-	●	-
	PARTITIONS	●	●	●	-	●	●	●	-
	DRAFT SCREENS	-	-	-	-	●	●	●	-
	OVERHEAD LUGGAGE RACKS	●	●	●	●	●	●	●	-
	DRIVERS DESK	●	●	●	-	-	-	-	-
	SUN BLIND	●	●	●	●	●	-	-	-
	AIR DUCTING	●	●	●	-	-	-	-	-
	CONTAINERS & COMPARTMENTS	●	-	-	-	-	-	-	-
	INTERIOR SURFACE GANGWAYS	●	●	●	-	-	-	-	-
	TABLES - including bottom surface	●	●	●	-	-	-	-	-
	ENCLOSURES FOR ELECTRICAL EQUIPMENT	●	●	●	-	-	-	-	-
	PASSENGER INFO DEVICES	-	-	-	●	●	-	-	-
Seats & Arm Rests	SEAT BACKS - Back & Base Shell	●	●	●	-	-	-	-	-
	TRAY TABLES	●	●	●	-	-	-	-	-
	ARM RESTS	●	●	●	-	-	-	-	-
Lighting, Electrical & Signage	LIGHT DIFFUSERS	-	-	-	●	-	●	-	-
	VERTICAL COVER STRIPS - ON WALLS	-	-	-	●	-	●	-	-
	LAMP COVERINGS	-	-	-	●	-	●	-	-
	CONNECTORS & ELECTROTECHNICAL APPLICATIONS	-	-	-	-	-	-	-	-
	CABLE CHANNELS	-	-	-	-	-	-	-	-
	LIGHTING COVERING	●	●	-	●	-	●	-	-
SPECIFICATIONS & NORMS	EUR EN 45545-2:2013 R1 Interior Surfaces	HL3 @ 2.6-4mm	-	-	-	-	-	-	-
	EUR EN 45545-2:2013 R4 Light Diffusers	-	-	-	HL3 @ 2-4mm	-	-	-	-
	EUR EN 45545-2:2013 R6 Passenger Seat Shells	HL3 @ 2.6-4mm	-	-	-	-	-	-	-
	EUR EN 45545-2:2013 R22 Connectors & Electrotechnical applications	-	-	-	-	-	-	-	-
	DE DIN 5510-2:2009	-	S4/SR2/ST2 @3-4mm	S4/SR2/ST2 @3-5mm	S4/SR2/ST2 @3-6mm	-	-	-	-
	FR NF F 16-101 / -102	-	M1@2-4mm F1@ 3-4mm	-	M2/F2 @2-8mm	-	-	-	-
	FR Anti- Graffiti NF F 31-112 SNCF	-	-	Pass	-	-	-	-	-
	IT UNI CEI 11170-3	-	-	-	Class 1A @ 2-4mm	-	-	-	-
	POL PN-K-02511 & UIC564-2, Annex 7-11-15	-	P1(A)-R1-A D2(B)- T2 @3mm	-	P1(B)-R1-A D2-B @3mm	-	-	-	-
	USA ASTM E162 - Flame Spread Index $I_s \leq 35$ no flaming drips	Pass	Pass	Pass	-	-	-	-	-
	USA ASTM E162 - Flame Spread Index $I_s \leq 100$	-	-	-	to be tested	Pass	Pass	Pass	-
	USA ASTM E662 - Optical Smoke Density	Pass	Pass	Pass	to be tested	Pass	Pass	Pass	-
	USA ASTM E1354 - Heat Release	Data on file	Data on file	Data on file	to be tested	Pass	Pass	Pass	-
	INT Smoke Toxicity – BSS 7239, SMP800C	Pass	Pass	-	-	-	-	-	-
	INT UL-94 V0	-	@3mm (5VA)	-	@ 3mm	-	-	-	@ 0.23mm
	INDIA UIC 564-2 App 15 - Smoke Density	-	-	-	-	-	-	-	-
	INDIA NCD 1409 - Toxicity Index (100g)	-	-	-	-	-	-	-	-
	RUS GOST 12.1.044-89	-	FR(TG) T2 SLOW D3	-	-	-	-	-	-
	DE ECO FR - Chlorine & Bromine Free	●	●	●	-	-	-	-	-



OPAQUE RESIN

POLYCARBONATE & PC/ABS FR  
- Transportation

LEXAN 915R (LEXAN 916R) resin	Flame Retarded, High Flow, Mold Release
LEXAN EXL9330 resin	Flame Retarded, High Flow, Improved Impact & Processing
LEXAN 945U resin	Flame Retarded, UV Stabilized
LEXAN FST3403 resin	Flame Retarded, Improved Flow
LEXAN FST3002 resin	Flame Retarded, Improved Flow
LEXAN 505RU resin	Flame Retarded + 10%GF, UV Stabilized
LEXAN EXL5689 resin	Flame Retarded + 10%GF, Improved Impact & Processing
LEXAN 3412ECR resin	Flame Retarded + 20%GF
LEXAN 923X resin	Flame Retarded, High Flow, UV Stabilized
CYCOLOY C3650 resin	Flame Retarded PC/ABS, Extrusion
CYCOLOY CX7240 resin	Flame Retarded, High Flow PC/ABS, Improved Impact

[illegible]

-	-	-	●	●	-	-	-	●	-	●
-	-	-	●	●	-	-	-	●	-	●
-	-	-	●	●	-	-	-	●	-	●


[illegible][illegible]

# THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS

THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS				OPAQUE RESIN		OPAQUE RESIN			TRANSPARENT RESIN				
				PPE Blends FR - Transportation		POLYETHERIMIDE FR - Transportation			POLYCARBONATE FR - Transportation				
				Flame Retarded, Extrusion & Injection Moulding	Flame retarded, Extrusion	Flame Retarded, Natural	Flame Retarded + 30%GF	Flame Retarded + 20%GF, Improved Chemical Resistance, Mould Release	Flame Retarded, Extrusion, UV Stabilized (Also Available in Opal White)	Flame retarded, Extrusion, Special Satin Effect Opal White	Flame Retarded, Injection Moulding, UV Stabilized (Also Available in Opal White)	Flame Retarded, Injection Moulding, UV Stabilized	
				NORYL NH6010B resin	NORYL ENV150 resin	ULTEM 1000 (ULTEM 1010) resin	ULTEM 2300 resin	ULTEM CR55201R resin	LEXAN EX9332T resin	LEXAN FXD9332T resin WH 1G003X	LEXAN 2034 resin	LEXAN 945AU resin	
Ceilings & Side Walls	CEILING		-	-	-	-	-	-	-	-	-	-	
	WINDOW FRAME		-	-	-	-	-	-	-	-	-	-	
	WALL CLADDING		-	-	-	-	-	-	-	-	-	-	
	PARTITIONS		-	-	-	-	-	-	-	-	-	-	
	DRAFT SCREENS		-	-	-	-	-	-	-	-	-	-	
	OVERHEAD LUGGAGE RACKS		-	-	-	-	-	-	-	-	-	-	
	DRIVERS DESK		-	-	-	-	-	-	-	-	-	-	
	SUN BLIND		-	-	-	-	-	-	-	-	-	-	
	AIR DUCTING		-	-	-	-	-	-	-	-	-	-	
	CONTAINERS & COMPARTMENTS		-	-	-	-	-	-	-	-	-	-	
	INTERIOR SURFACE GANGWAYS		-	-	-	-	-	-	-	-	-	-	
	TABLES - including bottom surface		-	-	-	-	-	-	-	-	-	-	
ENCLOSURES FOR ELECTRICAL EQUIPMENT		-	-	-	-	-	-	-	-	-	●		
PASSENGER INFO DEVICES		-	-	-	-	-	-	-	-	-	-	-	
Seats & Arm Rests	SEAT BACKS - Back & Base Shell		-	-	-	-	-	-	-	-	-	-	
	TRAY TABLES		-	-	-	-	-	-	-	-	-	-	
	ARM RESTS		-	-	-	-	-	-	-	-	-	-	
Lighting, Electrical & Signage	LIGHT DIFFUSERS		-	-	-	-	-	-	●	●	●	-	
	VERTICAL COVER STRIPS - ON WALLS		-	-	-	-	-	-	-	-	-	-	
	LAMP COVERINGS		-	-	-	-	-	-	-	-	-	-	
	CONNECTORS & ELECTROTECHNICAL APPLICATIONS		-	-	-	-	-	-	●	-	●	-	
	CABLE CHANNELS		●	-	●	●	●	-	-	-	-	-	
	LIGHTING COVERING		●	●	-	-	-	-	●	●	●	-	
SPECIFICATIONS & NORMS	EUR	EN 45545-2:2013 R1	Interior Surfaces	HL3 @ 2mm HL1 @ 3-4mm	-	-	-	-	-	-	-	-	
	EUR	EN 45545-2:2013 R4	Light Diffusers	-	-	-	-	-	HL3 @ 2-3mm	HL3 @ 2-3mm	HL3 @ 2-3mm	-	
	EUR	EN 45545-2:2013 R6	Passenger Seat Shells	HL3 @ 2mm	-	-	-	-	-	-	-	-	
	EUR	EN 45545-2:2013 R22	Connectors & Electrotechnical applications	-	-	-	-	-	-	-	-	HL3 @ 3mm	
	DE	DIN 5510-2:2009		S4/SR2/ST2 @ 2-4mm	-	-	-	-	S4 / SR1 / ST2 @ 2-3mm	-	S4 / SR2 / ST2 @ 2-4mm	-	
	FR	NF F 16-101 / -102		M2 / F1 / I3 @ 2-3mm	M2 / F3 @ 2mm	M1 / F2 @ 2-3mm	F1 / I2 @ 2-3mm	F1 / I3 @ 3mm	M1 / F2 @ 2mm M2 / F2 @ 3mm	-	M2 / F2 @ 2-4mm	F1 @ 2mm	
	FR	Anti- Graffiti NF F 31-112 SNCF		-	-	-	-	-	-	-	-	-	
	IT	UNI CEI 11170-3		-	-	-	-	-	-	-	-	-	
	POL	PN-K-02511 & UIC564-2, Annex 7-11-15		-	-	-	-	-	-	-	-	-	
	USA	ASTM E162 - Flame Spread Index I <sub>s</sub>		@ 1.5mm	-	(@3.2mm)	-	-	-	-	-	-	
	USA	ASTM E662 - Optical Smoke Density		@ 1.5mm	-	(@3.2mm)	-	-	-	-	-	-	
	USA	ASTM E1354 - Heat Release		-	-	(@3.2mm)	-	-	-	-	-	-	
	INT	Smoke Toxicity – BSS 7239, SMP800C		-	-	(@3.2mm)	-	-	-	-	-	-	
	INT	UL-94 V0		@ 1.5mm	@ 1.5mm	@ 0.75mm	@ 0.25mm	@ 1.5mm	@ 1.5mm	-	@ 2.5mm	@ 3mm	
	INDIA	UIC 564-2 App 15 - Smoke Density		-	-	-	-	-	-	-	-	-	
	INDIA	NCD 1409 - Toxicity Index (100g)		-	-	-	-	-	-	-	-	-	
	RUS	GOST 12.1.044-89		-	-	-	-	-	-	-	-	-	
	DE	ECO FR - Chlorine & Bromine Free		●	●	●	●	●	●	-	-	●	●



# GLOBAL COMPANY WITH LOCAL SERVICES & SUPPLY

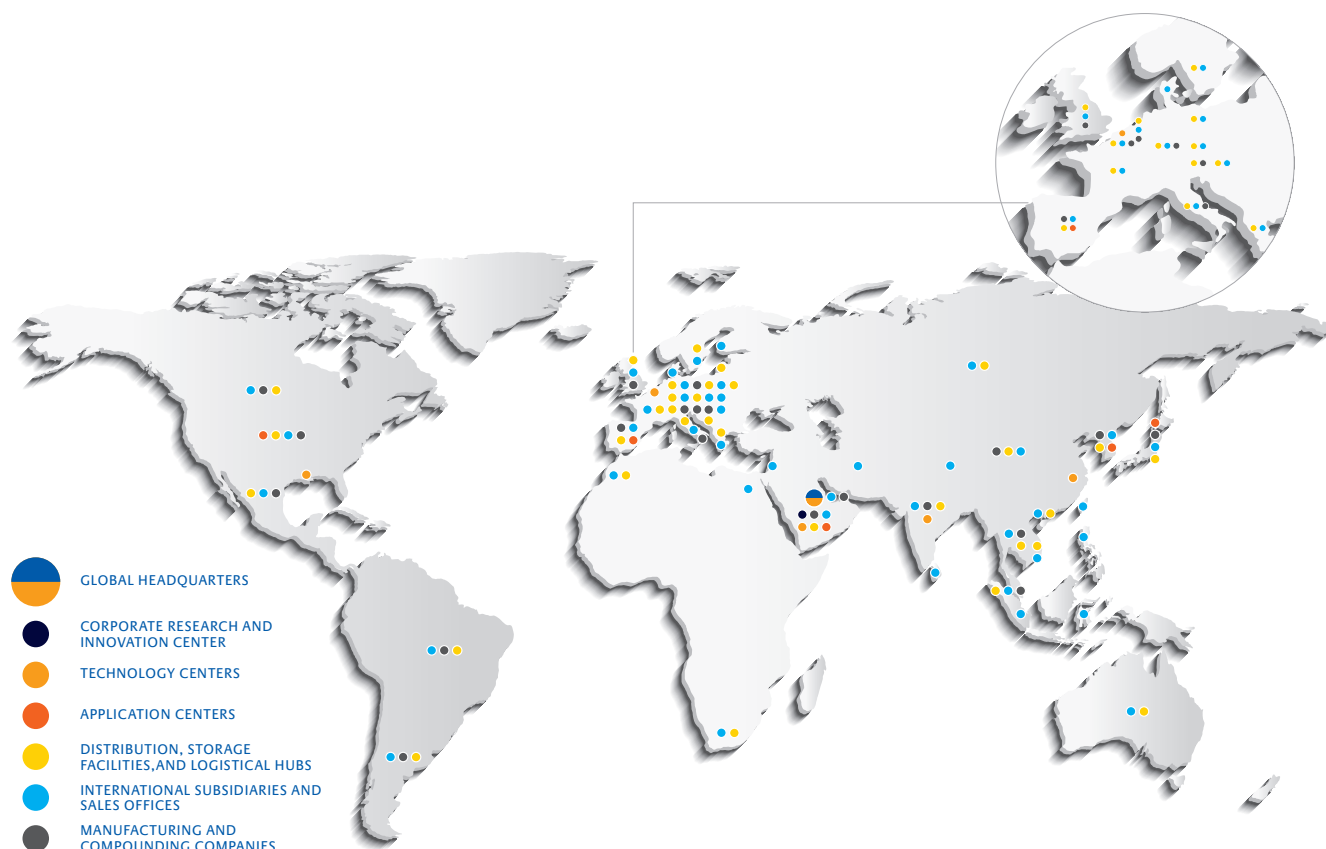

SABIC IS COMMITTED TO ITS CUSTOMERS AROUND THE WORLD  
WITH A PORTFOLIO OF SPECIALTY FILM & SHEET MATERIALS,  
APPLICATION SUPPORT AND WORLDWIDE SERVICES.

SABIC operates a worldwide network of sales, distribution, research, manufacturing and technical service facilities. SABIC serves customers around the world in a broad spectrum of industries and applications. SABIC offers global cross-business resources and expertise, and from its network of technical centers the company provides a variety of services. These include hands-on engineering and technical support that extends

from selecting the right material to characterization of mechanical, thermal, UV/heat aging data, advanced light measurements and optical modeling to part design and installation guidelines. The company also offers a local team, complete supply chain, and distribution organization to ensure a reliable source of materials to its customers wherever their manufacturing site is located.

SABIC ranks among the world's top petrochemical companies, and is a global market leader in the production of polyethylene, polypropylene, advanced thermoplastics, glycols, methanol and fertilizers. SABIC operates in more than 45 countries across the world with 40,000 employees worldwide. It has significant research resources with 18 dedicated technology and innovation facilities in Saudi Arabia, the USA, the Netherlands, Spain, India and China.

## CONTACT US

### Middle East and Africa

#### SABIC Global Headquarters

PO Box 5101  
Riyadh 11422  
Saudi Arabia  
T +966 (0) 1 225 8000  
F +966 (0) 1 225 9000  
E [info@sabic.com](mailto:info@sabic.com)

### Americas

2500 CityWest Boulevard  
Suite 100  
Houston, Texas 77042  
USA  
T +1 800 323 3783  
T +1 713 430 2301  
F +1 888 443 2033  
E [sales.spinside@sabic.com](mailto:sales.spinside@sabic.com)

### Europe

Plasticslaan 1  
4612 PX  
Bergen op Zoom  
The Netherlands  
T +31 (0)164 293678  
F +31 (0)164 293272  
E [sfs.info@sabic.com](mailto:sfs.info@sabic.com)

### Asia Pacific

2550 Xiupu Road  
Pudong  
201319 Shanghai  
China  
T +86 21 2037 8188  
F +86 21 2037 8288  
E [sfs.info@sabic.com](mailto:sfs.info@sabic.com)



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.  
© 2017 Copyright SABIC. All Rights Reserved.