




SPECIALTIES

SAFETY+ AESTHETICS

LIGHTWEIGHT, COMPLIANT THERMOPLASTIC MATERIALS
FOR RAILWAY INTERIORS

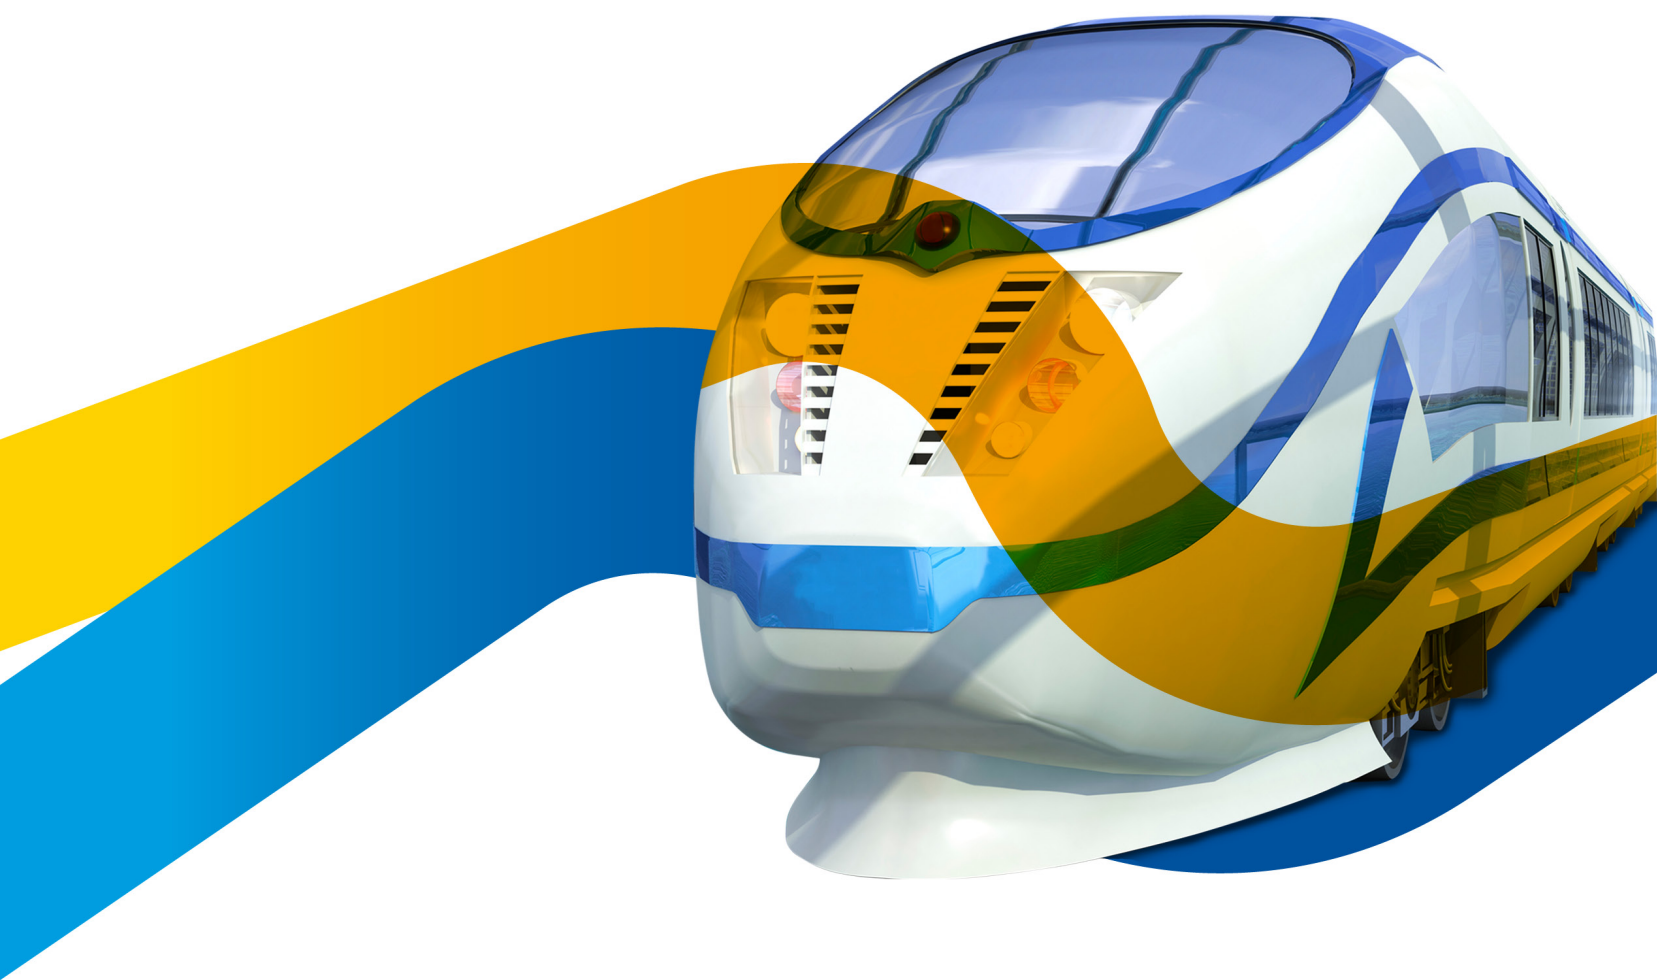

CHEMISTRY THAT MATTERS™

COMBINING THERMOPLASTICS EXPERTISE WITH IN-DEPTH KNOWLEDGE OF THE INDUSTRY STANDARDS, REGULATIONS AND TRENDS, SABIC IS COMMITTED TO KEEPING ITS CUSTOMERS IN THE TRANSPORTATION INDUSTRY AT THE LEADING EDGE OF MATERIALS AND PROCESSING TECHNOLOGIES.

SABIC OFFERS A PORTFOLIO OF HIGH PERFORMANCE, ENGINEERING THERMOPLASTICS INCLUDING RESINS, SHEETS, FILMS AND COMPOSITES, SPECIFICALLY DESIGNED FOR RAILWAY INTERIORS THAT CAN MEET INDUSTRY STANDARDS AND FIRE RESISTANCE REGULATIONS; MAY REDUCE OVERALL SYSTEM COSTS; AND ENHANCE THE AESTHETICS, SAFETY AND COMFORT OF THE TRAIN CABIN ENVIRONMENT.

SAFETY, AESTHETICS & PERFORMANCE



Today's public transportation industry is increasingly focused on safety. To create differentiated designs for new rail carriages or when refurbishing old ones, manufacturers are seeking the latest material solutions that not only meet current and upcoming safety regulations but also provide additional benefits ranging from durability and anti-vandalism protection to improved aesthetics, lower weight and system cost reduction.

Currently, fire safety regulations for rail interiors vary across Europe. Although there is a move towards standardization through the EN 45545-2:2016 standard regulation, manufacturers currently must contend with a range of requirements from one nation to another. SABIC has proactively developed and independently tested several materials designed specifically for compliance with the new standard.

SABIC offers a number of materials for railway interior applications that conform to leading European fire safety norms and supports increased material needs for

- Weight reduction
- Increased fire safety
- Graffiti resistance
- Vandalism resistance
- Lower system cost
- Design freedom
- Easy repairation
- Paint reduction



LIGHTWEIGHT MATERIALS COMPLYING WITH INDUSTRY STANDARDS

The broad portfolio of materials for the rail interiors sector manufactured by SABIC can help manufacturers meet evolving fire safety requirements while delivering additional advantages. The company offers a one-stop shop comprising new plastics solutions, assistance with materials and process selection and technical support services worldwide.

SABIC offers a broad portfolio of engineering resins, sheet, film and composite materials for interior applications that conform to leading European fire safety norms and with EN 45545-2:2016 regulation.

SABIC'S SHEET PORTFOLIO

- ULTEM™ R16SG29 sheet R1 and R6 (1, 2, 3, 4 mm) at HL3
- LEXAN™ F2000 sheet in clear & opal white R4 (2, 3 ,4 mm)
- LEXAN H6500 sheet
- LEXAN XHR6200 sheet R1 (3 mm) and R6 (2 mm) at HL3

SABIC'S RESIN PORTFOLIO

- ULTEM resin
- LEXAN resin
- LEXAN FST resin
- NORYL™ low smoke resins
- CYCOLOY™ resin



RAILWAY PASSENGER SAFETY & REGULATORY OVERVIEW

Operation Category (OC)	Design Category (DC)			
	N	A	D	S
1	HL1	HL1	HL1	HL2
2	HL2	HL2	HL2	HL2
3	HL2	HL2	HL2	HL3
4	HL3	HL3	HL3	HL3

OC = Operation Category related to passenger escape time
(OC 1 = shortest escape time, OC 4 = longest escape time)
DC = N, A, D, S = Design Category related to type of vehicle
A Automatic train D Double deck vehicle S Sleeping and couchette vehicle N Standard vehicles
HL = Hazard Level (HL1 = lowest, HL3 = highest hazard level)
HL3 = most stringent regulations regarding flame, smoke, toxicity and heat release.
R1 = Requirements for Interior components such as ceiling and sidewalls
R4 = Requirements for lighting applications
R6 = Requirements for back shell and base shell of passenger seats
R22 = Requirements for electro-technical applications and connectors

WEIGHT OUT & PART INTEGRATION

Engineering thermoplastics solutions from SABIC can help manufacturers address the growing demand for sustainability, lower system costs, improved durability and comfort and design innovation. Compared to metal, thermosets and glass, these materials can significantly lower system costs through consolidation of parts to streamline production, avoidance of secondary operations such as painting, coating, machining and polishing, and lower shipping costs by reducing weight.

ULTEM R16SG29 sheet is a polyetherimide (PEI) material that features inherent flame retardancy and low smoke emission. It complies with the EN45545-2 norm at the highest level (Hazard Level 3) for R1 & R6 applications (requirements for interior components) across all four occupational categories at 1, 2, 3 and 4 mm. ULTEM R16SG29 sheet delivers excellent impact resistance and chemical resistance for easy cleaning, anti-graffiti performance and long use of life.



ULTEM R16SG29 (PEI) sheet railway interior cladding

LEXAN H6500 sheet is an opaque, solid, low-gloss PC/ABS blend that delivers high stiffness for railway sidewalls, tables and seating. Its sustainable flame retardant performance meets the requirements of the Restriction of Hazardous Substances (RoHS) directive and it delivers non-chlorinated and non-brominated product technology. LEXAN H6500 sheet complies with current European standards including the French NF F16-101 M1/F1 norm (at 2-4 mm). The material can be thermoformed at a lower temperature than traditional PC materials. Its molded-in color capability can help avoid the cost and environmental hazards of secondary painting and provides excellent aesthetics.

LEXAN F2000 sheet, available in clear transparent and translucent opal white colors, is a flame retardant, lightweight product that can be an excellent choice for light diffusers and light covers. It offers ease of processing, excellent formability and can help achieve part integration in train ceilings with light diffusers. It complies with EN 45545-2 standard for R4 (Requirements for lighting components), German DIN 5510 S4/SR2/ST2 norms at 3 mm and French NF F16-101 M2 F2 rating at 2-8 mm.



Eurostar international train selected LEXAN sheet for its light diffusers.



Masterplex selected LEXAN sheets to create the Italian railway's most challenging interior feature, a train ceiling complete with light diffusers.

LEXAN H6006 sheet is a high-modulus PC/acrylonitrile-butadiene-styrene (PC/ABS) product that meets the Polish norms for side wall and ceiling applications (PN-K-02512, PN-L-02501, PN-K-02505) and UIC 564-2, Annex 7-11-15 at 3 and 4 mm. LEXAN H6006 sheet provides environmentally responsible flame retardance according the German DIN-VDE 0472 part 815 norm.

Potential applications include sidewalls, tables and seating.

LEXAN H6200 sheet, which complies with the German DIN 5510 norm: S3 SR2 ST2 at 3 mm and S4 SR2 ST2 at 4 mm, offers an attractive cost-benefit balance with less-demanding requirements. It delivers excellent impact performance at low temperatures (ductility down to -20 °C), good colorability and excellent thermoforming at lower temperatures than standard PC materials.

LEXAN XHR6200 sheet is a polycarbonate (PC) copolymer solution for rail interior applications to meet EN 45545 fire safety norm at the highest possible hazard level rating HL3 (R6) for seating (2 mm) and (R1) for ceiling and side walls (3 mm).



Railway interior using LEXAN sheet



Compin chose LEXAN™ EXL resin to make various seating parts for the “Future Interior of the TGV” French railways high-speed train.

LEXAN FST resin (flame-smoke-toxicity) polycarbonate (PC) copolymer is the first thermoplastic resin solution for rail seating applications to meet the strictest fire safety requirements under the EN 45545-2 standard. LEXAN FST3403 copolymer – developed specifically for seat back shells and side covers – achieved the highest possible hazard level rating HL3 while LEXAN FST3002 resin achieves HL2 requirements (R6) for seating under EN 45545-2. In addition to its exceptional heat release, smoke density and toxicity performance, documented by independent laboratory testing, the LEXAN FST copolymer provides high flow capabilities that enable large parts, such as seat back shells, to be injection molded without marks, texture defects, flow lines and other surface defects. Another aesthetic benefit of the copolymer is its ability to be custom colored, which avoids the need for secondary painting.

LEXAN EXL resin demonstrates durability in railway seating designed for Très Grande Vitesse (TGV) – the French railway high-speed trains. COMPIN chose this super-tough polycarbonate resin with added impact performance and low temperature ductility. LEXAN EXL resin maintains impact ductility after outdoor exposure, demonstrating good weatherability. It also has a low temperature ductility to -60 °C. This resin's flame retardancy conforms to Blue Angel and TCO99 standards and resists a variety of industrial and consumer chemicals. LEXAN EXL resin also has a 20 - 40% reduction in cycle time processability. This resin exhibits good flow properties, extensive color capability, and I3-F2-M2 ratings that meet the French Railways standards (NF F16101 & NF F16102). It also matched the customer's specific requirement for a particular shade of grey (gris 150 sable). This, plus its light-weight, makes LEXAN EXL resin a great materials candidate for various railway seating parts.

NORYL NH6010B resin, offers low smoke density (ASTM E662 test) and toxicity (NF X 70-100 test) values compared to metal conduits, while remaining economically viable. This can be a critical advantage in transportation applications, as the first four minutes after the start of a fire are considered crucial in terms of occupant survival. Materials that generate low smoke in this short span can help facilitate passengers' exit to safety. With increasing awareness about environmental concerns, Fraenkische Rohrwerke (Germany), manufacturer of electrical conduit and drainage systems, introduced a range of halogen-free conduits based on NORYL NH6010B non-halogenated resin offering low smoke, toxicity, and flame performance to comply with IEC 61386, the European Union (EU) standard for electrical conduit and suitable for extrusion or injection molding.




For first-class railcars' tough, new seat back shells and side panels, Grammer Railway Interior GmbH has selected SABIC's new LEXAN FST copolymer – which meets requirements for the highest hazard level (HL3) for R6 under Europe's EN 45445-2 harmonized standard for fire safety.

CYCOLOY resins are amorphous PC/ABS blends that offer the superior mechanical properties and heat resistance of polycarbonate (PC) resins combined with the excellent processability of ABS materials. In addition, CYCOLOY resins offer non-brominated and non-chlorinated FR systems, odorless solutions and superior heat aging and color stability properties versus comparable ABS materials.


Generic property comparison

PROPERTY	ABS MATERIALS	PC/ABS
Halogen free FR	●	●
Low emission / odorless	●	●
Heat aging	●	●
Color stability	●	●
High Heat	●	●
Impact @ RT	●	●
Impact @ low T	●	●
Shrinkage	●	●
Flow	●	●

ULTEM resin spun fibers may address your need for inherent flame resistance; low smoke toxicity; aesthetic. For railway interior fabrics and panels, ULTEM polyetherimide (PEI) resin from SABIC has the high-temperature performance and inherent flame resistance manufacturers need to meet the increasing challenges of stringent flame resistance and low FST (Flame, Smoke and Toxicity) regulations. Plus, with great aesthetic qualities and good dyeability, it's a smart way to achieve both compliance and appearance at the same time. This advanced amorphous polymer allows woven fabrics to be colored using conventional exhaust dying techniques, resulting in exceptional colorfastness and high tolerance to UV light. ULTEM resin also offers lightweight advantages along with outstanding mechanical integrity at elevated temperatures, and can be blended with other fibers for an optimal balance of performance and cost.

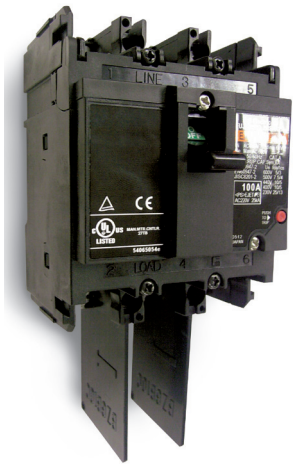

Fuji Electric using NORYL resins for switch gear isolator plates

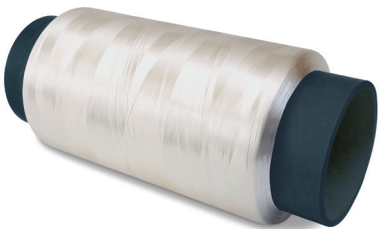

Flame retardant ULTEM fibers.



ANTI-VANDALISM

For passenger comfort and overall usability, thermoplastics from SABIC provide ease of cleaning, protection against graffiti and high impact performance to resist vandalism.

SABIC's new product series, called [LEXAN™ KH sheet](#) is a series of opaque products with outstanding anti-graffiti properties that will help railway interior designers and manufacturers to create aesthetically-pleasing components which are resistant to graffiti and vandalism, helping lower maintenance cost. LEXAN KH sheet series meet the requirements of current German DIN rail standard (DIN 5510-2:2009), offering customers a non-chlorinated and non-brominated material option supporting their sustainability efforts.

Both new LEXAN sheet solutions comply with French anti-graffiti norm NF F 31-112, offering outstanding chemical resistance against graffiti and cleaning agents, providing cost-efficient choice. They are an excellent choice to replace polyvinyl chloride (PVC), polyester, vinyl ester or phenolic fiber-reinforced plastic (FRP) materials used in many interior train applications including interior panels, window frames, ceilings and other large interior parts.

[LEXAN MARGARD™ sheet](#) can be an excellent choice to reduce

railcar weight by replacing traditional glass, offering excellent abrasion resistance behavior combined with excellent chemical resistance. The product complies with the German rail standard, the French rail standard and the Italian rail standard. Additionally, LEXAN MARGARD sheet can provide reduced weight, high impact strength and forced entry protection, graffiti resistance, excellent flame retardance and UV- and abrasion resistance. LEXAN MARGARD sheet can be an excellent candidate for the compartment partitions.



Coated, transparent LEXAN MARGARD Sheet has been chosen by TOHO SHEET & FRAME CO., LTD, a leading Japanese converter, for the double glazing of side windows of The JAPAN RAILWAYS HOKKAIDO.





Italian railways compartment separators using LEXAN MARGARD sheet.

THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS

OPAQUE SHEET								
ULTEM Sheet (PEI)	POLYCARBONATE & Blends FR - Transportation							
High Modulus meets EN45545 HL3 Ceilings & Side Walls	High Modulus Chlorine/Bromine Free	Flame Retarded Polycarbonate Blend	High Impact FR PC Blend	High Impact FR PC Blend	High Modulus EN45545 HL2 Seats	Anti-Graffiti, High Stiff, Low Gloss Flame Retarded PC/ABS	Anti-Graffiti, Flame Retarded PC/ABS	Flame retarded PC Copolymer
ULTEM R16SG29 SHEET	LEXAN H6000 Sheet	LEXAN H6200M Sheet	LEXAN H6200 Sheet	LEXAN H6300 Sheet	LEXAN H6500 Sheet	LEXAN KH6500 sheet	LEXAN KH6200 sheet	LEXAN XHR6200 sheet

Ceilings & Side Walls	CEILING	●	●	●	●	●	●	●	●	●
	WINDOW FRAME	●	●	●	●	●	●	●	●	●
	WALL CLADDING	●	●	●	●	●	●	●	●	●
	PARTITIONS	●	●	●	●	●	●	●	●	●
	DRAFT SCREENS	-	-	-	-	-	-	-	-	-
	OVERHEAD LUGGAGE RACKS	●	●	●	●	●	●	●	●	●
	DRIVERS DESK	●	●	●	●	●	●	●	●	●
	SUN BLIND	●	●	●	●	●	●	●	●	●
	AIR DUCTING	●	●	●	●	●	●	●	●	●
	CONTAINERS & COMPARTMENTS	●	-	-	-	-	-	-	-	●
	INTERIOR SURFACE GANGWAYS	●	●	●	●	●	●	●	●	●
	TABLES - including bottom surface	●	●	●	●	●	●	●	●	●
	ENCLOSURES FOR ELECTRICAL EQUIPMENT	●	●	●	●	●	●	●	●	●
	PASSENGER INFO DEVICES	-	-	-	-	-	-	-	-	-
Seats & Arm Rests	SEAT BACKS - Back & Base Shell	●	●	●	●	●	●	●	-	●
	TRAY TABLES	●	●	●	●	●	●	●	-	●
	ARM RESTS	●	●	●	●	●	●	●	-	●
Lighting, Electrical & Signage	LIGHT DIFFUSERS	-	-	-	-	-	-	-	-	-
	VERTICAL COVER STRIPS - ON WALLS	-	-	-	-	-	-	-	-	-
	LAMP COVERINGS	-	-	-	-	-	-	-	-	-
	CONNECTORS & ELECTROTECHNICAL APPLICATIONS	-	-	-	-	-	-	-	-	-
	CABLE CHANNELS	-	-	-	-	-	-	-	-	-
	LIGHTING COVERING	●	●	●	●	●	●	-	-	-
SPECIFICATIONS & NORMS	EUR EN 45545-2:2013 R1 Interior Surfaces	HL3 @ 2.6-4mm	-	-	-	-	-	-	-	HL3 @ 3mm
	EUR EN 45545-2:2013 R4 Light Diffusers	-	-	-	-	-	-	-	-	-
	EUR EN 45545-2:2013 R6 Passenger Seat Shells	HL3 @ 2.6-4mm	-	-	-	-	-	-	-	HL3 @ 2mm
	EUR EN 45545-2:2013 R22 Connectors & Electrotechnical applications	-	-	-	-	-	-	-	-	-
	DE DIN 5510-2:2009	-	-	-	S3/SR2/ST2 @3mm S4/SR2/ST2 @4mm	-	S4/SR2/ST2 @3-4mm	S4/SR2/ST2 @3-5mm	S4/SR2/ST2 @3-5mm	-
	FR NF F 16-101 / -102	-	-	M1/F2 @ 3-4 mm	-	-	M1@2-4mm F1@ 3-4mm	-	-	-
	FR Anti- Graffiti NF F 31-112 SNCF	-	-	-	-	-	-	Pass	Pass	-
	IT UNI CEI 11170-3	-	-	-	-	-	-	-	-	-
	POL PN-K-02511 & UIC564-2, Annex 7-11-15	-	P1(A)-R1-D2(B)-T2 @4mm	-	-	-	P1(A)-R1-A D2(B)- T2 @3mm	-	-	-
	USA ASTM E162 - Flame Spread Index Is	Pass	Pass	-	-	-	Pass	Pass	-	-
	USA ASTM E662 - Optical Smoke Density	Pass	Pass	-	-	-	Pass	Pass	-	-
	USA ASTM E1354 - Heat Release	Data on file	Data on file	-	-	-	Data on file	Data on file	-	-
	INT Smoke Toxicity – BSS 7239, SMP800C	Pass	Pass	Pass	Pass	-	Pass	-	-	-
	INT UL-94 V0	-	@1.5mm	-	-	-	@3mm (5VA)	-	-	-
	INDIA UIC 564-2 App 15 - Smoke Density	-	-	-	-	Class B @ 3-4mm	-	-	-	-
	INDIA NCD 1409 - Toxicity Index (100g)	-	-	-	-	-	-	-	-	-
	RUS GOST 12.1.044-89	-	-	-	-	-	FR(TG) T2 SLOW D3	-	-	-
	DE ECO FR - Chlorine & Bromine Free	●	●	●	●	-	●	●	●	●


-	-	-	-	-
HL3 @ 2-4mm	-	-	-	-
-	-	-	-	-
-	-	-	-	-
S4/SR2/ST2 @3-6mm	S4/SR2/ST2 @6-8mm	-	-	-
M2/F2 @2-8mm	M2/F2 @3-8mm	M2/F2 @4-8mm	-	-
-		-	-	-
Class 1A @ 2-4mm	Class 1A @ 9.5mm	-	-	-
PI(B)-R1-A D2-B @3mm	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
@ 3mm	@ 3mm	-	@ 2mm	@ 0.23mm
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-		-

[illegible]

THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS

THERMOPLASTICS SHEET AND RESIN PORTFOLIO ADDRESSING TRENDS				OPAQUE RESIN		OPAQUE RESIN			TRANSPARENT RESIN			
				PPE Blends FR - Transportation		POLYETHERIMIDE FR - Transportation			POLYCARBONATE FR - Transportation			
				Flame Retarded, Extrusion & Injection Moulding	Flame retarded, Extrusion	Flame Retarded, Natural	Flame Retarded + 30%GF	Flame Retarded + 20%GF, Improved Chemical Resistance, Mould Release	Flame Retarded, Extrusion, UV Stabilized (Also Available in Opal White)	Flame retarded, Extrusion, Special Satin Effect Opal White	Flame Retarded, Injection Moulding, UV Stabilized (Also Available in Opal White)	Flame Retarded, Injection Moulding, UV Stabilized
				NORYL NH6010B resin	NORYL ENV150 resin	ULTEM 1000 (ULTEM 1010) resin	ULTEM 2300 resin	ULTEM CR55201R resin	LEXAN EX9332T resin	LEXAN FXD9332T resin WH 1G003X	LEXAN 2034 resin	LEXAN 945AU resin
Ceilings & Side Walls	CEILING		-	-	-	-	-	-	-	-	-	-
	WINDOW FRAME		-	-	-	-	-	-	-	-	-	-
	WALL CLADDING		-	-	-	-	-	-	-	-	-	-
	PARTITIONS		-	-	-	-	-	-	-	-	-	-
	DRAFT SCREENS		-	-	-	-	-	-	-	-	-	-
	OVERHEAD LUGGAGE RACKS		-	-	-	-	-	-	-	-	-	-
	DRIVERS DESK		-	-	-	-	-	-	-	-	-	-
	SUN BLIND		-	-	-	-	-	-	-	-	-	-
	AIR DUCTING		-	-	-	-	-	-	-	-	-	-
	CONTAINERS & COMPARTMENTS		-	-	-	-	-	-	-	-	-	-
	INTERIOR SURFACE GANGWAYS		-	-	-	-	-	-	-	-	-	-
	TABLES - including bottom surface		-	-	-	-	-	-	-	-	-	-
ENCLOSURES FOR ELECTRICAL EQUIPMENT		-	-	-	-	-	-	-	-	-	●	
PASSENGER INFO DEVICES		-	-	-	-	-	-	-	-	-	-	
Seats & Arm Rests	SEAT BACKS - Back & Base Shell		-	-	-	-	-	-	-	-	-	-
	TRAY TABLES		-	-	-	-	-	-	-	-	-	-
	ARM RESTS		-	-	-	-	-	-	-	-	-	-
Lighting, Electrical & Signage	LIGHT DIFFUSERS		-	-	-	-	-	-	●	●	●	-
	VERTICAL COVER STRIPS - ON WALLS		-	-	-	-	-	-	-	-	-	-
	LAMP COVERINGS		-	-	-	-	-	-	-	-	-	-
	CONNECTORS & ELECTROTECHNICAL APPLICATIONS		-	-	-	-	-	-	●	-	●	-
	CABLE CHANNELS		●	-	●	●	●	-	-	-	-	-
	LIGHTING COVERING		●	●	-	-	-	-	●	●	●	-
SPECIFICATIONS & NORMS	EUR	EN 45545-2:2013 R1	Interior Surfaces	HL3 @ 2mm HL1 @ 3-4mm	-	-	-	-	-	-	-	-
	EUR	EN 45545-2:2013 R4	Light Diffusers	-	-	-	-	-	HL3 @ 2-3mm	HL3 @ 2-3mm	HL3 @ 2-3mm	-
	EUR	EN 45545-2:2013 R6	Passenger Seat Shells	HL3 @ 2mm	-	-	-	-	-	-	-	-
	EUR	EN 45545-2:2013 R22	Connectors & Electrotechnical applications	-	-	-	-	-	-	-	-	HL3 @ 3mm
	DE	DIN 5510-2:2009		S4/SR2/ST2 @ 2-4mm	-	-	-	-	S4 / SR1 / ST2 @ 2-3mm	-	S4 / SR2 / ST2 @ 2-4mm	-
	FR	NF F 16-101 / -102		M2 / F1 / I3 @ 2-3mm	M2 / F3 @ 2mm	M1 / F2 @ 2-3mm	F1 / I2 @ 2-3mm	F1 / I3 @ 3mm	M1 / F2 @ 2mm M2 / F2 @ 3mm	-	M2 / F2 @ 2-4mm	F1 @ 2mm
	FR	Anti- Graffiti NF F 31-112 SNCF		-	-	-	-	-	-	-	-	-
	IT	UNI CEI 11170-3		-	-	-	-	-	-	-	-	-
	POL	PN-K-02511 & UIC564-2, Annex 7-11-15		-	-	-	-	-	-	-	-	-
	USA	ASTM E162 - Flame Spread Index Is		@ 1.5mm	-	(@3.2mm)	-	-	-	-	-	-
	USA	ASTM E662 - Optical Smoke Density		@ 1.5mm	-	(@3.2mm)	-	-	-	-	-	-
	USA	ASTM E1354 - Heat Release		-	-	(@3.2mm)	-	-	-	-	-	-
	INT	Smoke Toxicity – BSS 7239, SMP800C		-	-	(@3.2mm)	-	-	-	-	-	-
	INT	UL-94 V0		@ 1.5mm	@ 1.5mm	@ 0.75mm	@ 0.25mm	@ 1.5mm	@ 1.5mm	-	@ 2.5mm	@ 3mm
	INDIA	UIC 564-2 App 15 - Smoke Density		-	-	-	-	-	-	-	-	-
	INDIA	NCD 1409 - Toxicity Index (100g)		-	-	-	-	-	-	-	-	-
	RUS	GOST 12.1.044-89		-	-	-	-	-	-	-	-	-
	DE	ECO FR - Chlorine & Bromine Free		●	●	●	●	●	-	-	●	●

GLOBAL COMPANY WITH LOCAL SERVICES & SUPPLY

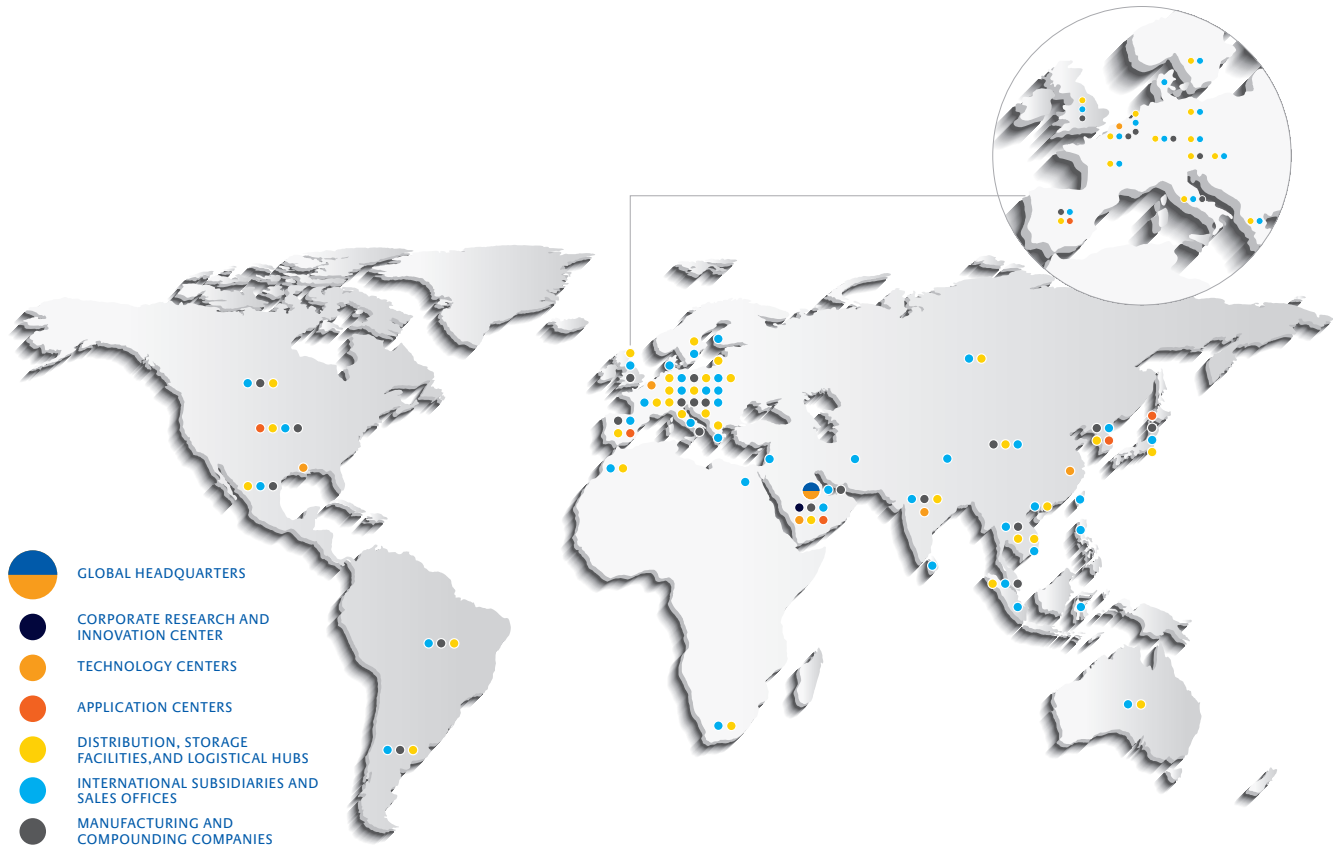

SABIC IS COMMITTED TO ITS CUSTOMERS AROUND THE WORLD
WITH A PORTFOLIO OF SPECIALTY FILM & SHEET MATERIALS,
APPLICATION SUPPORT AND WORLDWIDE SERVICES.

SABIC operates a worldwide network of sales, distribution, research, manufacturing and technical service facilities. SABIC serves customers around the world in a broad spectrum of industries and applications. SABIC offers global cross-business resources and expertise, and from its network of technical centers the company provides a variety of services. These include hands-on engineering and technical support that extends

from selecting the right material to characterization of mechanical, thermal, UV/heat aging data, advanced light measurements and optical modeling to part design and installation guidelines. The company also offers a local team, complete supply chain, and distribution organization to ensure a reliable source of materials to its customers wherever their manufacturing site is located.

SABIC ranks among the world's top petrochemical companies, and is a global market leader in the production of polyethylene, polypropylene, advanced thermoplastics, glycols, methanol and fertilizers. SABIC operates in more than 45 countries across the world with 40,000 employees worldwide. It has significant research resources with 18 dedicated technology and innovation facilities in Saudi Arabia, the USA, the Netherlands, Spain, India and China.

CONTACT US

Middle East and Africa

SABIC Global Headquarters

PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Americas

2500 CityWest Boulevard
Suite 100
Houston, Texas 77042
USA
T +1 800 323 3783
T +1 713 430 2301
F +1 888 443 2033
E sales.spinside@sabic.com

Europe

Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E sfs.info@sabic.com

Asia Pacific

2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 2037 8188
F +86 21 2037 8288
E sfs.info@sabic.com



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.
© 2017 Copyright SABIC. All Rights Reserved.