

LEXAN™ MRT SHEET

PRODUCT DATASHEET

DESCRIPTION

LEXAN™ MRT sheet is a transparent, high impact LEXAN polycarbonate sheet with a proprietary abrasion-resistant surface. LEXAN MRT sheet meets the performance requirements of ANSI Z26.1, required by the Department of Transportation per FMVSS 205, and UMTA guidelines for flammability for windows and lighting lenses.

TYPICAL PROPERTY VALUES ◆

PROPERTY	TEST METHOD	UNITS	VALUE
Physical			
Specific Gravity	ASTM D792	-	1.20
Light Transmission (Average), 1/8" Thick	ASTM D1003	%	88
Chemical Resistance	ANSI Z26.1	-	Passes#
Mechanical			
Tensile Strength, Ultimate	ASTM D638	psi	9,500
Flexural Strength	ASTM D790	psi	13,500
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	psi	1,000
Compressive Strength	ASTM D695	psi	12,500
Modulus of Elasticity	ASTM D638	psi	340,000
Drop Ball Impact Strength‡	SABIC Test	ft-lbs	
@ 73°F			>200
@ 32°F			>200
@ 0°F			>200
Thermal			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 ⁻⁵
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	260
Flammability			
Horizontal Burn (Flame Spread) AEB	ASTM D635	in	<1
Ignition Temperature	ASTM	°F	
Flash	D1929		873
Self			1,076

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics' representative.

Gasoline and kerosene - no tackiness, crazing or loss of transparency for a minimum of 48 hours.

‡ 5-lb steel ball dropped from a height of 40 feet

* Trademarks of SABIC Innovative Plastics IPBV


UL File Number: E121562

Abrasion Resistance Comparison†

		% Haze		
	Test Method	Uncoated Polycarbonate	Lexan MRT Sheet	Glass
Taber Abrasion 100 Cycles CS 10F	ASTM D 1044 Z26.1	35.0	1-3	0.5

† The Taber Abrader test measures the percent of change in haze that results from the grinding action of two abrasive impregnated wheels on the test samples. A constant load of 500 grams is maintained as the samples rotate on a turntable for a predetermined number of revolutions.

Impact Resistance

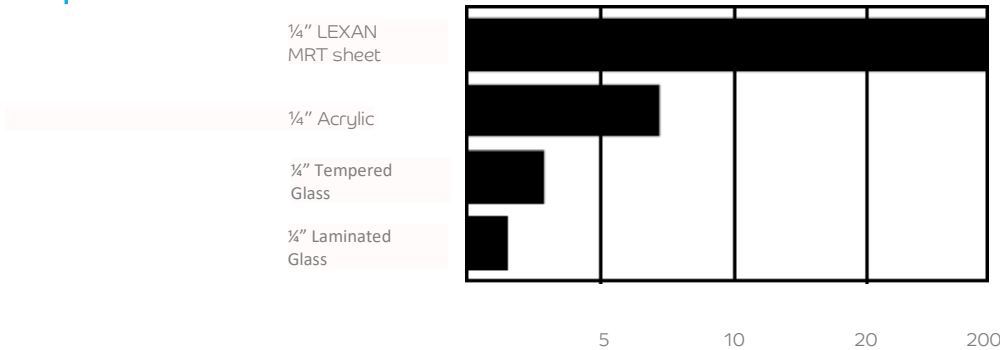

1) Drop Dart Test with a 5-lb steel dart and a 1" diameter tip.

Measured in foot -pounds

CONTACT US:

Middle East and Africa

SABIC Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Americas

Functional Forms
2500 City West
Boulevard Suite 100
Houston, TX 77042
USA
Toll-free (800) 323 3783
F (888) 443 2033
E spinside.sales@sabic.com

Europe

Functional Forms
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E ff.info@sabic.com

Asia Pacific

Functional Forms
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 2037 8188
F +86 21 2037 8288
E ff.info@sabic.com



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right. SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates, unless otherwise noted.

© 2021 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

www.sabic.com/sfs
